

Dvojradowé valčkové reťaze


podľa DIN 8187 (Európske)
ISO - R 606
ČSN 02 3311

Zweifach Rollenketten

nach DIN 8187 (Europäische Bauart)
ISO - R 606

Duplex roller chains

to DIN 8187 (European series)
ISO - R 606

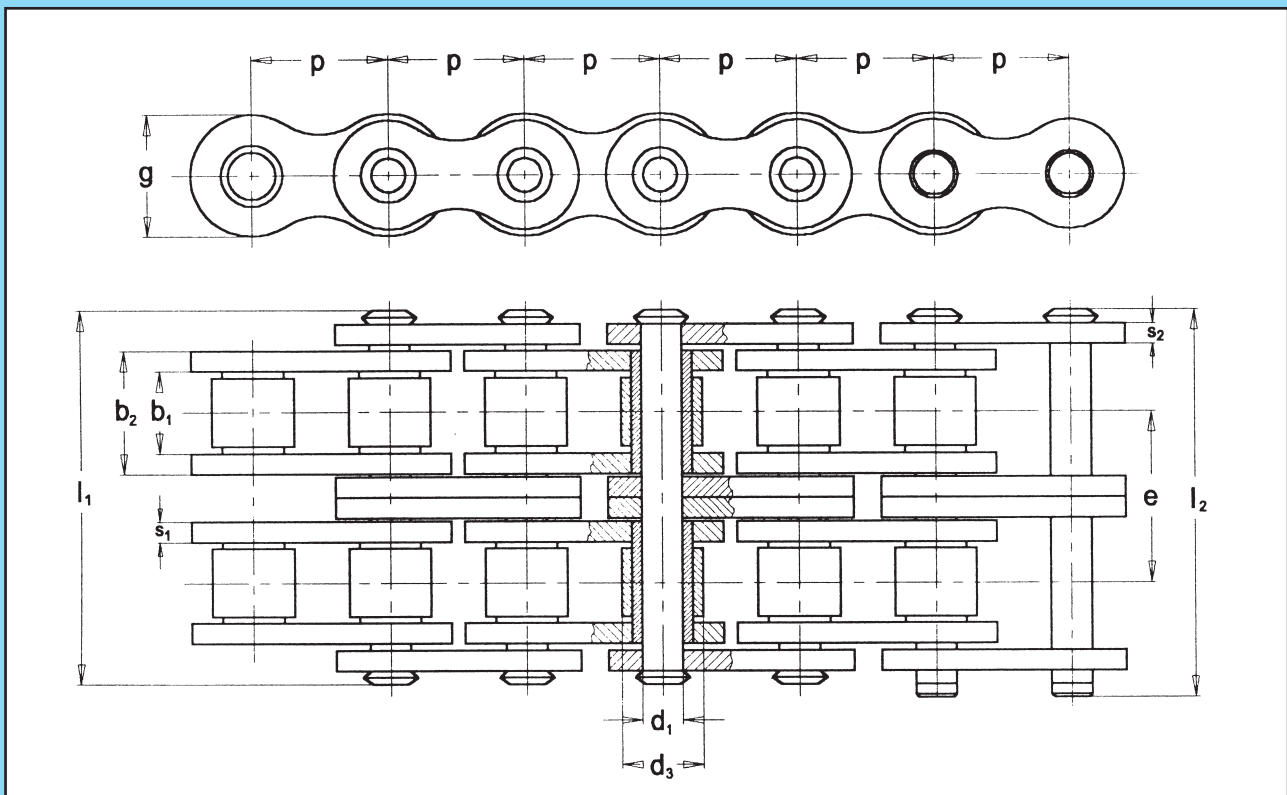

ISO Nr.	Obj. čís.	p mm	b ₁ mm min.	b ₂ mm max.	d ₁ mm h9	d ₃ mm h10	l ₁ mm	l ₂ mm	g mm	s ₁ mm	s ₂ mm	e mm	f mm ²	F _B kN min.	Q kg/m
05B-2	318 112 039 000	8,000	3,00	4,77	2,31	5,00	14,3	17,4	7,1	0,75	0,75	5,64	22	7,8	0,4
06B-2	318 112 059 000	9,525	5,72	5,53	3,28	6,35	23,8	27,1	8,2	1,30	1,30	10,24	56	16,9	0,8
08B-2	318 112 079 000	12,700	7,75	11,30	4,45	8,51	31,0	34,9	11,8	1,60	1,60	13,92	101	32,0	1,3
10B-2	318 112 099 000	15,875	9,65	13,28	5,08	10,16	36,2	40,3	14,7	1,60	1,60	16,59	134	44,5	1,8
12B-2	318 112 119 000	19,050	11,68	15,62	5,72	12,07	42,2	46,8	16,1	1,80	1,80	19,46	179	57,8	2,5
16B-2	318 112 139 000	25,400	17,02	25,40	8,28	15,88	68,0	73,4	21,0	3,50	3,00	31,88	421	110,0	5,2
20B-2	318 112 159 000	31,750	19,56	29,00	10,19	19,05	77,7	82,5	26,0	4,50	3,50	36,45	591	170,0	7,5
24B-2	318 112 179 000	38,100	25,40	37,90	14,63	25,40	101,0	106,9	33,0	6,00	5,00	48,36	1109	280,0	13,9
28B-2	318 112 199 000	44,450	30,99	46,50	15,90	27,94	124,0	129,2	36,6	7,00	6,00	59,56	1479	360,0	18,0
32B-2	318 112 219 000	50,800	30,99	45,50	17,81	29,21	123,8	131,7	41,8	7,00	6,00	58,55	1621	450,0	19,0
40B-2	318 112 239 000	63,500	38,10	55,70	22,89	39,37	152,7	158,6	52,0	8,00	8,00	72,29	2550	630,0	33,5
48B-2	318 112 259 000	76,200	45,72	70,50	29,24	48,26	190,0	199,1	63,4	12,00	10,00	91,21	4123	1000,0	48,6

f = Plocha klbu
F_B = Pevnosť pri pretrhnutí
Q = Hmotnosť reťaze

f = Gelenkfläche
F_B = Bruchkraft
Q = Kettengewicht

f = Bearing area
F_B = Breaking load
Q = Chain weight