

Trojradové valčkové reťaze


podľa DIN 8188 (Americké)
ISO - R 606
ČSN 02 3311

Dreifach Rollenketten

nach DIN 8188 (Amerikanische Bauart)
ISO - R 606

Triplex roller chains

to DIN 8188 (American series)
ISO - R 606

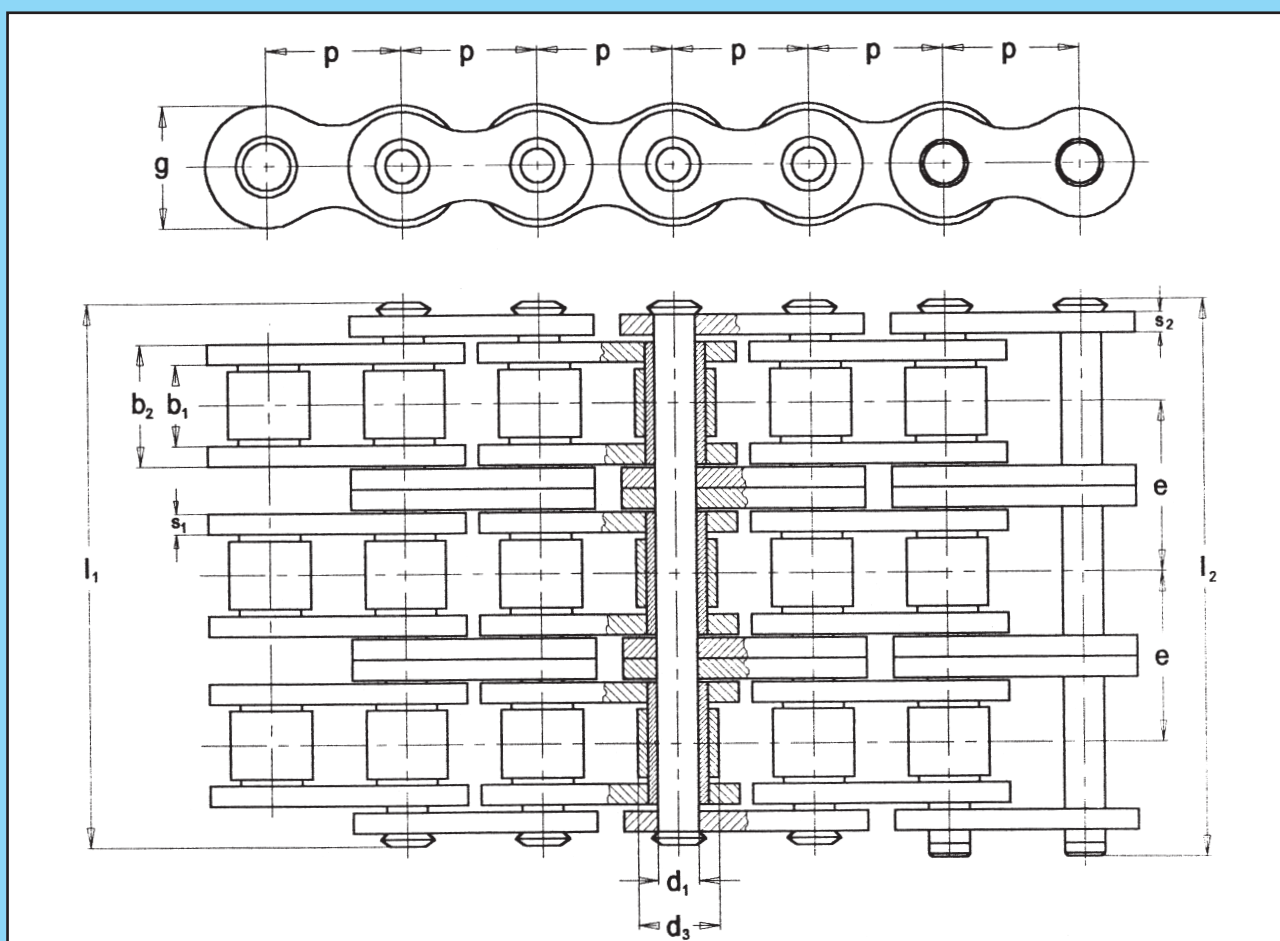

ISO Nr.	Obj. čís.	p mm	b_1 mm min.	b_2 mm max.	d_1 mm h9	d_3 mm h10	l_1 mm	l_2 mm	g mm	s_1 mm	s_2 mm	e mm	f mm ²	F_B kN min.	Q kg/m
08A-3	318 113 069 000	12,700	7,85	11,15	3,96	7,95	46,7	50,6	12,0	1,6	1,6	14,38	132	42,3	1,8
10A-3	318 113 089 000	15,875	9,40	13,80	5,08	10,16	57,9	62,0	15,0	2,0	2,0	18,11	210	66,6	2,9
12A-3	318 113 109 000	19,050	12,57	17,70	5,94	11,91	72,6	77,2	18,0	2,4	2,4	22,78	315	95,4	4,3
16A-3	318 113 129 000	25,400	15,75	22,40	7,92	15,85	90,5	95,0	23,6	3,0	3,0	29,29	535	170,1	7,5
20A-3	318 113 149 000	31,750	18,90	27,40	9,53	19,05	112,2	117,2	29,4	4,0	4,0	35,76	783	265,5	11,9
24A-3	318 113 169 000	38,100	25,22	35,30	11,10	22,23	141,0	146,4	35,0	5,0	5,0	45,44	1176	381,0	17,6
28A-3	318 113 189 000	44,450	25,22	37,00	12,70	25,40	151,8	157,0	41,0	5,5	5,5	48,87	1410	517,2	20,7
32A-3	318 113 209 000	50,800	31,55	45,00	14,27	28,58	182,0	186,7	47,0	6,5	6,5	58,55	1926	680,4	29,7
40A-3	318 113 229 000	63,500	37,85	54,70	19,84	39,68	222,7	228,5	59,0	8,0	8,0	71,55	3256	1061,4	43,3
48A-3	318 113 249 000	76,200	47,35	67,50	23,80	47,63	271,0	278,8	70,0	9,5	9,5	87,83	4820	1530,9	66,0

f = Plocha kĺbu
 F_B = Pevnosť pri pretrhnutí
 Q = Hmotnosť reťaze

f = Gelenkfläche
 F_B = Bruchkraft
 Q = Kettengewicht

f = Bearing area
 F_B = Breaking load
 Q = Chain weight