

Jednoradové valčkové reťaze


podľa DIN 8187 (Európske)
Rovné dosky

Einfach Rollenketten

nach DIN 8187 (Europäische Bauart)
Gerade Laschen

Simple roller chains

to DIN 8187 (European series)
Straight plates

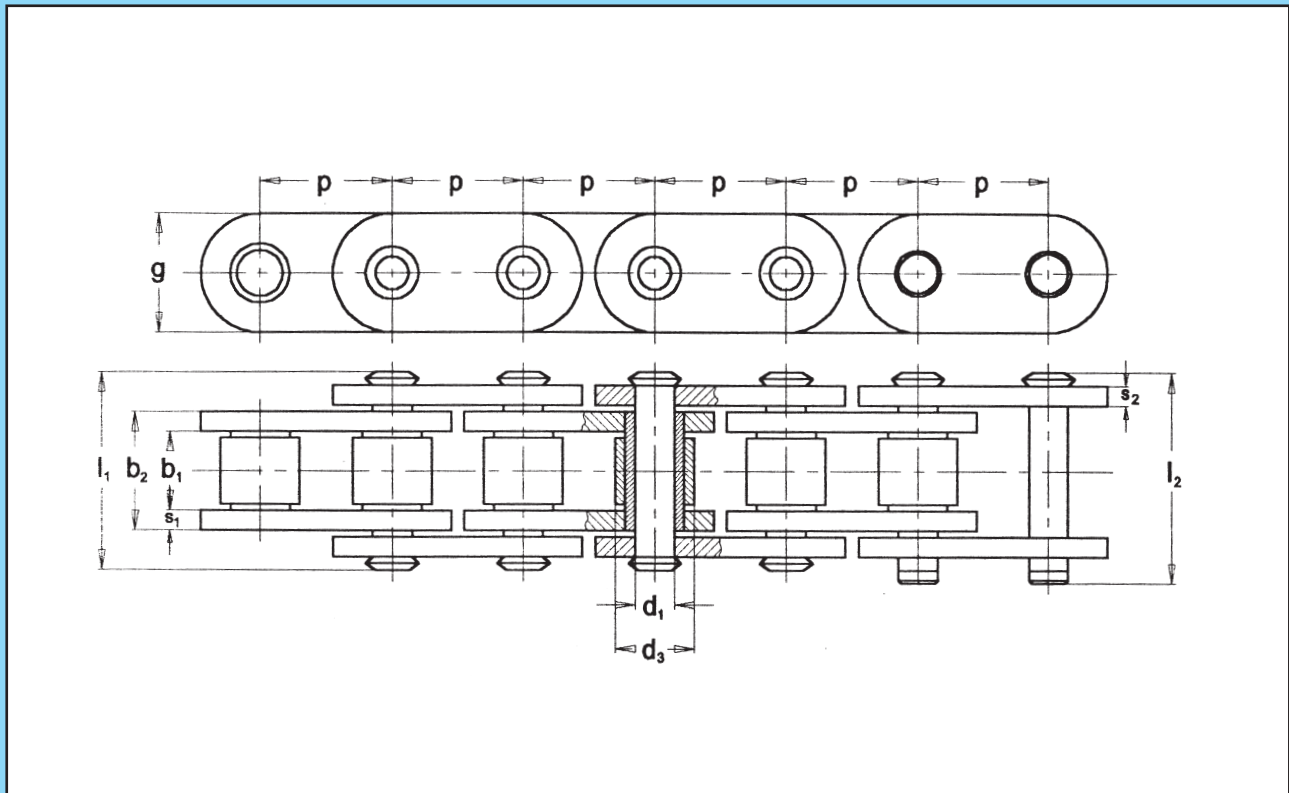

ISO Nr.	Obj. čís.	p mm	b ₁ mm min.	b ₂ mm max.	d ₁ mm h9	d ₃ mm h10	l ₁ mm	l ₂ mm	g mm	s ₁ mm	s ₂ mm	f mm ²	F _B kN min.	Q kg/m
16B-IRD	318 111 131 000	25,4	17,02	25,45	8,28	15,88	36,1	41,5	21,0	3,5	3,0	210	60,0	3,0
16B-IRD _X	318 151 007 000	25,40	17,02	25,45	8,28	15,88	36,1	41,5	24,0	3,5	3,0	210	60,0	3,0
20B-IRD	318 111 151 000	31,75	19,56	29,00	11,19	19,05	41,2	46,0	26,0	4,5	3,5	296	95,0	4,1
24B-IRD	318 111 171 000	38,10	25,40	37,90	14,63	25,40	53,4	58,5	33,4	6,0	5,0	554	160,0	7,9
28B-IRD	318 111 191 000	44,45	30,99	46,50	15,90	27,94	65,0	69,6	36,6	7,0	6,0	739	200,0	9,5
32B-IRD	318 111 211 000	50,80	30,99	45,50	17,81	29,21	65,2	73,1	41,8	7,0	6,0	810	250,0	10,6
40B-IRD	318 111 231 000	63,50	38,10	55,70	22,89	39,37	80,4	86,3	52,0	8,0	8,0	1275	380,0	18,5
48B-IRD	318 111 251 000	76,20	45,72	70,50	29,24	48,26	99,1	107,9	63,4	12,0	10,0	2061	600,0	28,5
56B-IRD	318 111 271 000	88,90	53,34	81,33	34,32	53,98	117,0	137,0	77,85	13,0	12,0	2791	850,0	35,0
64B-IRD	318 111 291 000	101,60	60,96	92,20	39,40	63,50	131,4	155,0	90,17	14,0	13,0	3625	1100,0	60,0
72B-IRD	318 111311 000	114,30	68,58	103,80	44,48	72,39	148,7	173,0	103,6	17,0	15,0	4617	1400,0	80,0

Pozn.:

Na požiadanie vo viacrádovom prevedení.

f = Plocha kĺbu
F_B = Pevnosť pri pretrhnutí
Q = Hmotnosť reťaze

Bemerkung:

Auf Verlangen auch mehrfache Ausführung.

f = Gelenkfläche
F_B = Bruchkraft
Q = Kettengewicht

Note:

Also in multiple execution on request.

f = Bearing area
F_B = Breaking load
Q = Chain weight