

Fleyerové reťaze LL


podľa DIN 8152

Fleyerketten LL

nach DIN 8152

Leaf chains LL

to DIN 8152

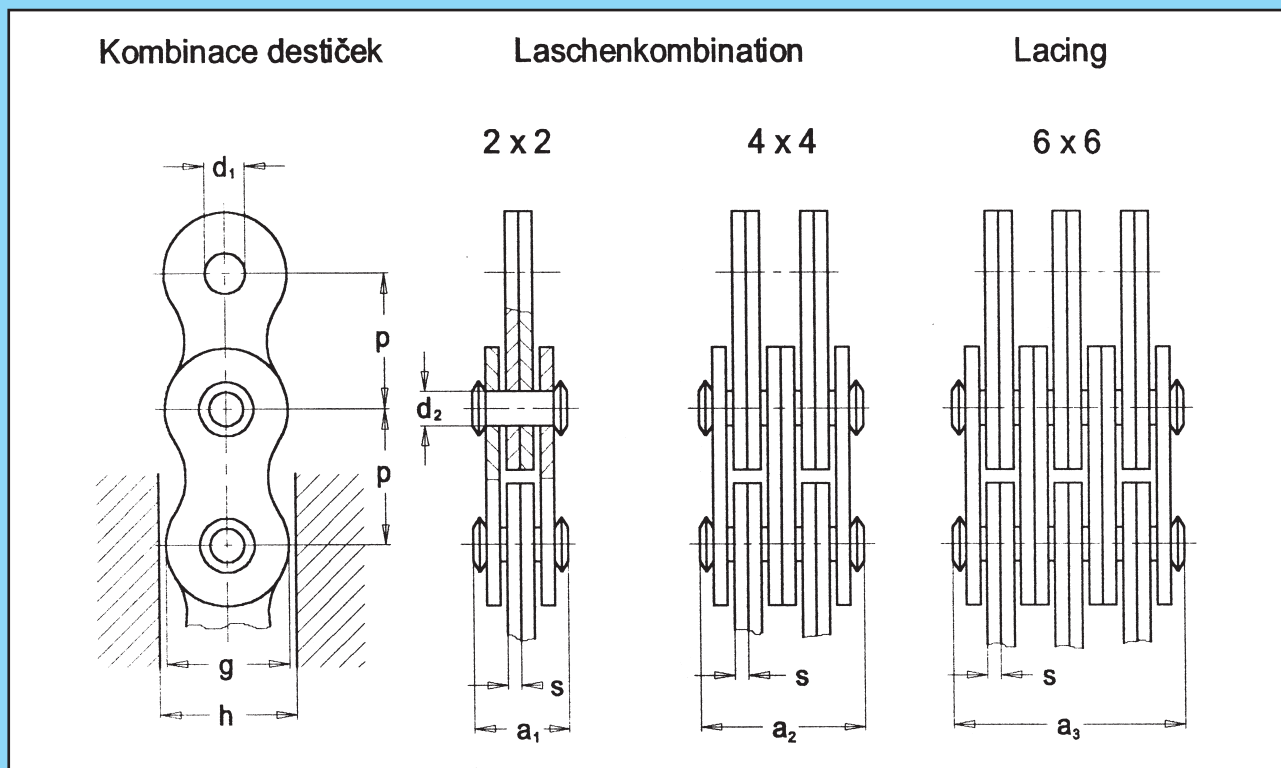

Tov. oz.	Obj. čís.	p mm	Kombinácia doštičiek	d ₁ mm min.	d ₂ mm max.	g mm	h mm min.	s mm	a ₁ mm max.	a ₂ mm max.	a ₃ mm max.	f mm ²	F _B kN min.	Q kg/m
LL 1622	318 731 254 040	25,40	2x2	8,29	8,28	21,0	21,4	3,0	17,2	-	-	50	58	1,5
LL 1644	318 731 254 080	25,40	4x4	8,29	8,28	21,0	21,4	3,0	-	30,2	-	100	116	3,0
LL 1666	318 731 254 120	25,40	6x6	8,29	8,28	21,0	21,4	3,0	-	-	43,2	150	174	4,4
LL 2022	318 731 317 040	31,75	2x2	10,20	10,19	26,0	26,7	3,5	20,1	-	-	71	95	2,3
LL 2044	318 731 317 080	31,75	4x4	10,20	10,19	26,0	26,7	3,5	-	35,1	-	142	190	4,4
LL 2066	318 731 317 120	31,75	6x6	10,20	10,19	26,0	26,7	3,5	-	-	50,1	213	285	6,6
LL 2422	318 731 381 040	38,10	2x2	14,65	14,63	33,0	33,7	5,0	28,4	-	-	146	170	4,4
LL 2444	318 731 381 080	38,10	4x4	14,65	14,63	33,0	33,7	5,0	-	49,4	-	292	340	8,5
LL 2466	318 731 381 120	38,10	6x6	14,65	14,63	33,0	33,7	5,0	-	-	70,4	438	510	12,5
LL 2822	318 731 444 040	44,45	2x2	15,92	15,90	36,6	37,5	6,0	34,0	-	-	190	200	5,4
LL 2844	318 731 444 080	44,45	4x4	15,92	15,90	36,6	37,5	6,0	-	60,0	-	381	400	10,5
LL 2866	318 731 444 120	44,45	6x6	15,92	15,90	36,6	37,5	6,0	-	-	86,0	570	600	15,5
LL 3222	318 731 508 040	50,80	2x2	17,83	17,81	41,8	42,7	6,5	35,0	-	-	224	260	6,2
LL 3244	318 731 508 080	50,80	4x4	17,83	17,81	41,8	42,7	6,5	-	61,0	-	448	520	12,1
LL 3266	318 731 508 120	50,80	6x6	17,83	18,81	41,8	42,7	6,5	-	-	87,0	672	780	18,0

Pozn.:

Na požiadanie
aj v iných kombináciách.
f = Plocha klbu
F_B = Pevnosť pri pretrhnutí
Q = Hmotnosť reťaze

Bemerkung:

Es ist möglich auch in anderen
Kombination Forden.
f = Gelenkfläche
F_B = Bruchkraft
Q = Kettengewicht

Note:

If requested, another lacing
available.
f = Bearing area
F_B = Breaking load
Q = Chain weight