

Unášače pre dopravné reťaze


podľa továrnej normy
Tlačný typ

Befestigungslaschen für Förderketten


nach Werksnorm
Gedrückte Form

Attachment plates for conveyor chains

to works' standard
Push type

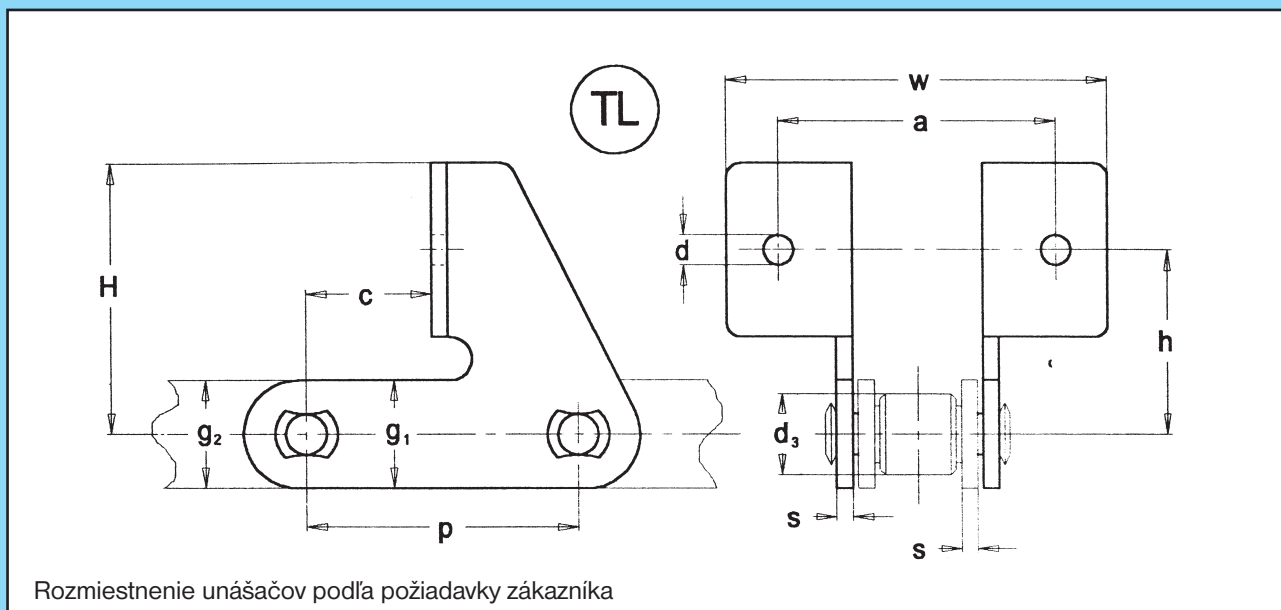

ISO Nr.	p mm	d ₃ mm □	F _B kN min.	a mm	w mm	h mm	H mm	c mm	d mm	s mm	g ₁ mm	g ₂ mm
M 80	100	25	80	94	132	68	100	46	11	5	40	35
M 112	100	30	112	100	138	68	100	45	11	6	40	40

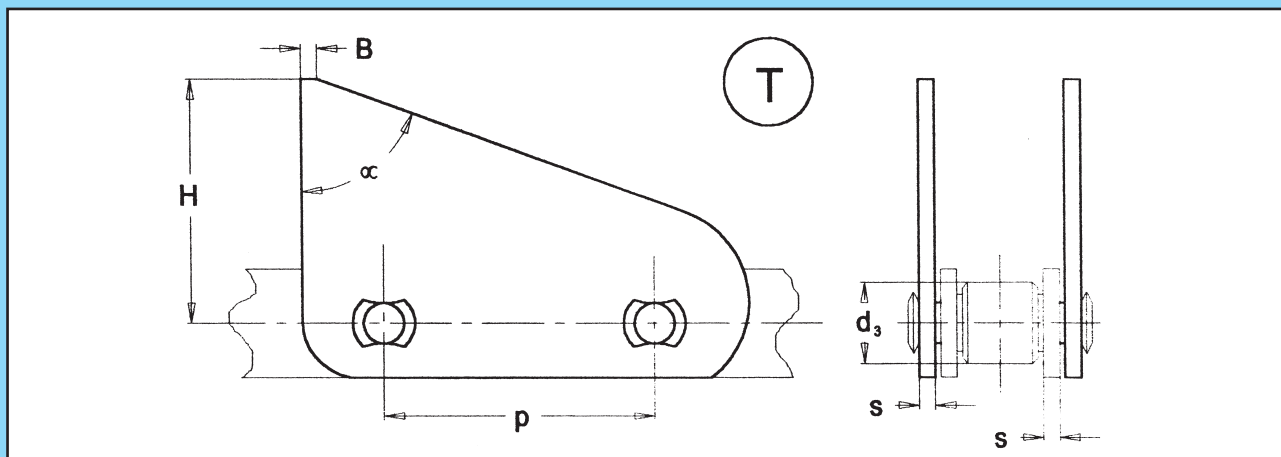

ISO Nr.	p mm	d ₃ mm □	F _B kN min.	B mm	H mm	α mm	s mm
M 80	100	25	80	5	76,5	73	5
M 112	100	30	112	6	90,0	70	6

□ = Voľná miera
F_B = Pevnosť pri pretrhnutí

□ = Freimaß
F_B = Bruchkraft

□ = Free dimension
F_B = Breaking load